


SPECIFICATIONS

Size	Metric	British
Max. Working Height(Indoor)	7.60m	24ft 11in
Max. Working Height(Outdoor)	6.60m	21ft 8in
Max. Platform Height(Indoor)	5.60m	18ft 5in
Max. Platform Height(Outdoor)	4.60m	15ft 1in
Overall Length(Without Outriggers)	1.37m	4ft 6in
Overall Length(With Outriggers)	1.52m	5ft
Overall Width (0.81m	2ft 8in
Overall Height(Rails Up)	2.01m	6ft 7in
Overall Height(Rails Down)	1.65m	5ft 5in
Platform Size(Length×Width)	1.37m×0.70m	4ft 6in×2ft 4in
Platform Extension Size ©	0.60m	2ft
Ground Clearance(Stowed/Raised)	0.06m/0.015m	2in/1in
Wheelbase (1.13m	3ft 8in
Turning Radius(Inside/Outside)	0.45m/1.60m	1ft 6in/5ft 3in
Tyres	φ230×100mm	φ 9×4in

Performance		
S.W.L	227kg	500lb
S.W.L On Extension	113kg	249lb
Max. Occupants(Indoor/Outdoor)	2/1	2/1
Gradeability	25%	25%
Travel Speed(Stowed)	4.0km/h	2.49mph
Travel Speed(Raised)	0.6km/h	0.37mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	30/23sec	30/23sec

Weight		
Overall Weight	1300kg	2866lb

Power		
Hydraulic Tank	4L	1gal
Battery	24V/115Ah	24V/115Ah
Charger	24V/15A	24V/15A
Driving Motor	2×24VDC/0.5kW	2×24VDC/0.5kW
Lifting Motor	24VDC/2.2kW	24VDC/2.2kW

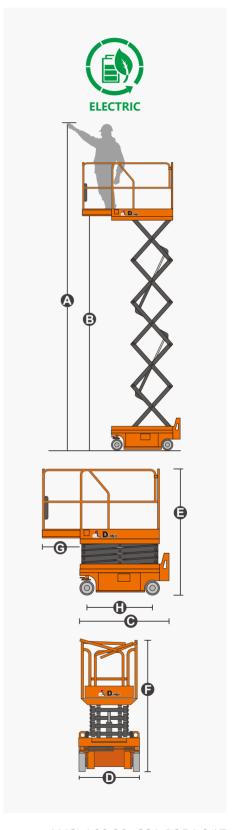

ANSI A92.20, CSA B354.6.17



Self-propelled Scissor Lifts



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- · Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- · Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deging, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











