




SPECIFICATIONS

Size	Metric	British
Max. Working Height(Indoor)	7.80m	25.6 ft
Max. Working Height(Outdoor)	7.80m	25.6 ft
Max. Platform Height(Indoor)	5.80m	19ft
Max. Platform Height(Outdoor)	5.80m	19ft
Overall Length ©	1.86m	73.2 in
Overall Width D	0.76m	29.9 in
Overall Height(Rails Up)	2.15m	84.6 in
Overall Height(Rails Down)	1.83m	72.0 in
Platform Size(Length×Width)	1.67m×0.74m	65.7×29.1 in
Platform Extension Size G	0.90m	35.4 in
Ground Clearance(Stowed/Raised)	0.09m/0.016m	3.5 in/0.6 in
Wheelbase (1.36m	53.5 in
Turning Radius(Inside/Outside)	0m/1.64m	0in/64.6 in
Tyres	Ф323×100mm	Ф12.7×4 in

227kg	500lb
113kg	250lb
2/1	2/1
25%	25%
4.5km/h	2.8mph
0.6km/h	0.4mph
X-1.5°/Y-3°	X-1.5°/Y-3°
21/25sec	21/25sec
	113kg 2/1 25% 4.5km/h 0.6km/h X-1.5°/Y-3°

Weight			
Overall Weight	1630kg	3586lb	

Power		
Hydraulic Tank	6.5L	1.7gal
Battery	24V/185Ah	24V/185Ah
Charger	24V/30A	24V/30A
Driving Motor	2×15VAC/0.5kW	2×15VAC/0.5kW
Lifting Motor	15VAC/3.0kW	15VAC/3.0kW

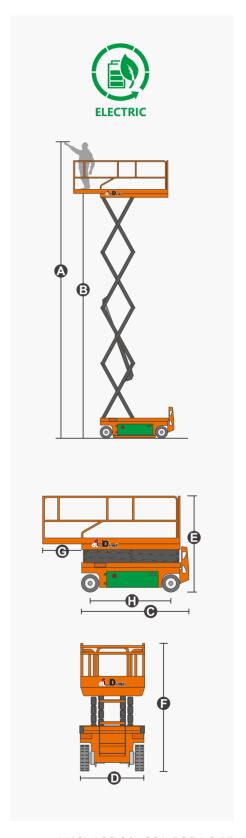

ANSI A92.20, CSA B354.6.17







FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- · Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- · Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deging, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com









