


## SPECIFICATIONS

| Size                                     | Metric      | British           |
|--|-------------|-------------------|
| Max. Working Height(Inside) <b>A</b>     | 14.30m      | 46ft 11in         |
| Max. Working Height(Outside)             | 14.30m      | 46ft 11in         |
| Max. Platform Height(Inside) <b>B</b>    | 12.30m      | 40ft 4in          |
| Max. Platform Height(Outside)            | 12.30m      | 40ft 4in          |
| Overall Length(Without Outriggers)       | 3.19m       | 10ft 6in          |
| Overall Length(With Outriggers) <b>C</b> | 3.84m       | 12ft 7in          |
| Overall Width <b>D</b>                   | 1.76m       | 5ft 9in           |
| Overall Height(Rails Up) <b>E</b>        | 2.74m       | 9ft               |
| Overall Height(Rails Down) <b>F</b>      | 1.97m       | 6ft 6in           |
| Platform Size(Length×Width)              | 2.88m×1.52m | 9ft 5in × 5ft     |
| Platform Extension Size <b>G</b>         | 1.43m       | 4ft 8in           |
| Ground Clearance                         | 0.24m       | 9in               |
| Wheelbase <b>H</b>                       | 2.29m       | 7ft 6in           |
| Turning Radius(Inside/Outside)           | 2.15m/4.85m | 7ft 1in/15ft 11in |
| Tyres                                    | 26×12-16.5  | 26×12-16.5        |

| Performance                    |             |             |
|--------------------------------|-------------|-------------|
| S.W.L                          | 363kg       | 800lb       |
| S.W.L On Extension             | 136kg       | 299lb       |
| Max. Occupants(Inside/Outside) | 3/2         | 3/2         |
| Gradeability                   | 40%         | 40%         |
| Travel Speed(Stowed)           | 5.00km/h    | 3.10mph     |
| Travel Speed(Raised)           | 0.45km/h    | 0.28mph     |
| Max. Working Slope             | X-1.5°/Y-3° | X-1.5°/Y-3° |
| Up/Down Speed                  | 45/46sec    | 45/46sec    |

| Weight         |        |         |
|----------------|--------|---------|
| Overall Weight | 5050kg | 11133lb |

| Power          |                |                |
|----------------|----------------|----------------|
| Diesel Engine  | 18.2kW/3000rpm | 18.2kW/3000rpm |
| Diesel Tank    | 47L            | 12.4gal        |
| Hydraulic Tank | 71L            | 18.7gal        |

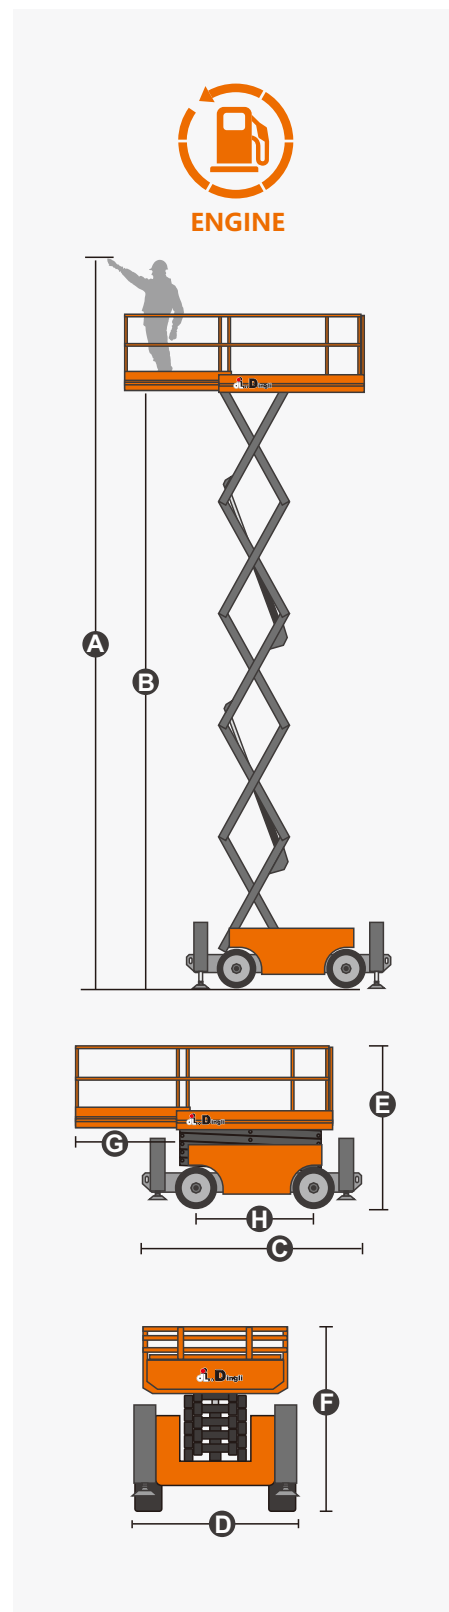

ANSI A92.20, CSA B354.6.17

## FEATURES

### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Standard Transport Forklift Pockets
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height
- Oscillating Axle Chassis



### ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: [export@cndingli.com](mailto:export@cndingli.com)

<https://en.cndingli.com>

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2022-09

