


SPECIFICATIONS

Size	Metric	British
Max. Working Height(Inside)	18.00m	59ft 1in
Max. Working Height(Outside)	18.00m	59ft 1in
Max. Platform Height(Inside)	16.00m	52ft 6in
Max. Platform Height(Outside)	16.00m	52ft 6in
Overall Length ©	4.88m	16ft
Overall Width (2.29m	7ft 6in
Overall Height(Rails Up)	3.19m	10ft 6in
Overall Height(Rails Down)	2.49m	8ft 2in
Platform Size(Length×Width)	3.98m×1.83m	13ft 1in ×6ft
Platform Extension Size	1.43m/1.16m	4ft 8in/3ft 10in
Ground Clearance	0.30m	1ft
Wheelbase ①	2.86m	9ft 5in
Turning Radius(Inside/Outside)	2.35m/5.20m	7ft 9in/17ft 1in
Tyres	33×12-20	33×12-20

Performance		
S.W.L	680kg	1499lb
S.W.L On Extension	227kg	500lb
Max. Occupants(Inside/Outside)	4/4	4/4
Gradeability	40%	40%
Travel Speed(Stowed)	6.0km/h	3.73mph
Travel Speed(Raised)	1.0km/h	0.62mph
Max. Working Slope	X-2°/Y-3°	X-2°/Y-3°
Up/Down Speed	80/70sec	80/70sec

Weight			
Overall Weight	8900kg	19621lb	

Power		
Hydraulic Tank	130L	34gal
Battery	48V/450Ah	48V/450Ah
Charger	48V/60A	48V/60A
Driving Motor	4×32VAC/3.3kW	4×32VAC/3.3kW
Lifting Motor	2×48VDC/8.0kW	2×48VDC/8.0kW

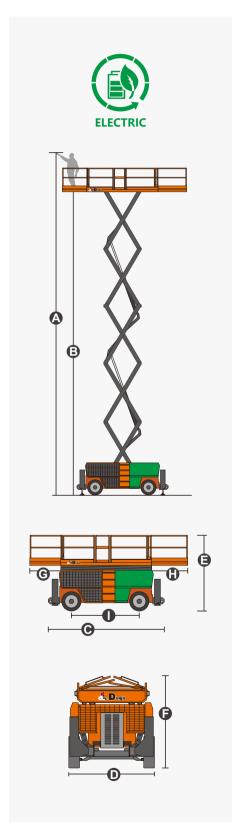

ANSI A92.20, CSA B354.6.17





FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Dual Slide-Out Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Standard Transport Forklift Pockets
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Oscillating Axle Chassis



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











